


# SOLYX® Glass Finishes

## **SX-1164 Frosted Squares**

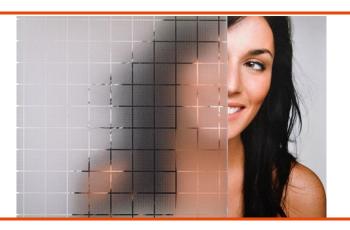

## **Product Description**

 ${
m SOLYX} \otimes {
m SX-1164}$  Frosted Squares is a textured polyester film with a 7/8" frosted square pattern and 1/16" clear spacing. Within each 7/8" square are 64 tiny squares. This film is ideal for semi-privacy while still allowing excellent light transmission.

### **Specifications**

| Specifications              |                    |
|-----------------------------|--------------------|
| Product Code                | SX-1164            |
| Product Family              | Geometric          |
| Film Type                   | Polyester          |
| Adhesive Type               | Pressure-Sensitive |
| Usage                       | Interior           |
| Available Width             | 48"                |
| Full Roll Length            | 25 linear feet     |
| Thickness                   | 2 mil              |
| Shading Coefficient         | 0.55               |
| Visible Light Transmission  | 70%                |
| UV Transmission             | 47%                |
| Total Solar Energy Rejected | 38%                |
| Solar Energy Absorbed       | 25%                |

## **Product Construction**

Face Film

2 mil Polyester

Adhesive

Clear, Pressure-Sensitive

Release Liner

Silicone Coated

## **Product Details**

 $SOLYX \otimes$  **SX-1164 Frosted Squares** Is a textured, polyester film with a 7/8" frosted square pattern and 1/16" clear spacing. Within each 7/8" square are 64 tiny squares. This 2-mil thick film is supplied with a silicone coated liner which protects the clear, pressure-sensitive adhesive. It is designed for application to interior glass, single- or double-pane, and is ideal for privacy, decorative, or architectural applications.

## **Flammability Rating**

This product meets ASTM E84 and is classified as Class A as defined in NFPA 101, Life Safety Code®.

**LEED Credit EQ 4.1 Low Emitting Materials, Adhesives & Sealants**This product has zero VOC content according to 40 CFR 59, Subpart D (EPA method 24).

## **Installation and Warranty**

#### Installation

Installation should be in accordance with the manufacturer's installation instructions. This film is applied using the same tools and techniques used for window tinting films.

## Warranty

This SOLYX® product will be free from defects in material and manufacture for a period of five (5) years from the date of installation. See warranty information for specific details.

## **Product Distribution and Contact Information**

### Distribution

 ${\bf SOLYX} \& \ \ {\bf Decorative\ Films\ are\ available\ through\ authorized} \\ {\bf Installing\ Dealers,\ Distributors,\ or\ directly\ from\ Decorative\ Films,\ LLC.}$ 

Samples submitted upon request.

## **Contact Information**

Decorative Films, LLC 1-888-657-5224 www.decorativefilm.com