


# SOLYX® Glass Finishes

## SX-8400 Holographic Clear

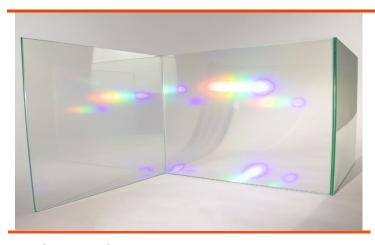

#### **Product Details**

SOLYX® **SX-8400 Holographic Clear** is a clear polyester film with a light refracting/holographic finish. This film has a strong, permanent adhesive.

### **Specifications**

Product Code	SX-8400
Product Family	Graphic Media, Holographic/Clear
Film Type	Polyester
Adhesive Type	Permanent
Usage	Interior and Exterior
Available Width(s)	48"
Full Roll Length	100 linear feet
Thickness	2 Mil
Visible Light Transmission	78%
UV Rejection	45%

#### **Product Construction**

#### **Face Film**

**Polyester** 

#### Adhesive

Clear, Solvent Acrylic

### **Release Liner**

3.5 mil Silicone Coated PET

\*This printable and plottable film is provided for general use, but its suitability for specific applications may vary. Users are advised to conduct thorough testing with their equipment and under their specific conditions to determine its compatibility and performance for their intended purposes. The manufacturer makes no guarantees, expressed or implied, regarding the fitness of this film for any particular printing or plotting application. Usage without prior testing is at the user's discretion and risk. It is the responsibility of the user to ensure that the film meets their specific requirements before full-scale production or critical

applications

## **Product Description**

SOLYX \$ SX-8400 Holographic Clear is a versatile glass film, engineered to be both printed and cut for graphics. This makes it an excellent choice for unique projects. This product can also be used as a top coat, or laminate to create a light refracting/holographic finish.

## **Flammability Rating**

This product meets ASTM E84 and is classified as Class A as defined in NFPA 101, Life Safety Code $^{\oplus}$ .

**LEED Credit EQ 4.1 Low Emitting Materials, Adhesives & Sealants**This product has zero VOC content according to 40 CFR 59, Subpart D (EPA method 24).

## Media\* Use and Warranty

#### **Print**

Suitable for most printing.

## **Plotting and Masking**

RTape AT65 is the recommended masking tape when plotting SX-MD-8301.

#### Installation

Wet applied using dish soap and water solution. See manufacturer's full installation guidelines for further details.

### Warranty

This  $\mathbf{SOLYX}$ ® product will be free from defects in material and manufacture for a period of five (5) years from the date of interior installation. Exterior installations have a three (3) year warranty. See warranty information for specific details.

## **Product Distribution and Contact Information**

#### Distribution

SOLYX® Decorative Films are available through authorized Installing Dealers, Distributors, or directly from Decorative Films, LLC.

Samples submitted upon request.

#### **Contact Information**

Decorative Films, LLC 1-888-657-5224 www.decorativefilm.com