


## SOLYX® Glass Finishes

### SX-MD-8304 Velvet Frost

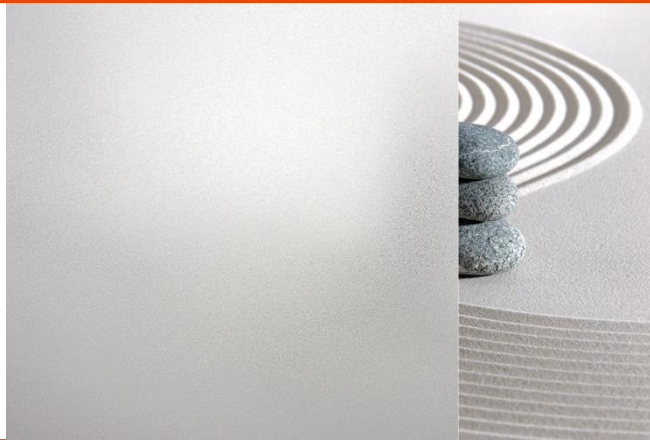

#### Product Details

SOLYX® SX-MD-8304 Velvet Frost is a translucent, embossed, vinyl which simulates heavily sandblasted glass. The clear adhesive is protected with a 3.5 mil traction liner, perfect for printing and plotting.

#### Specifications

Product Code	SX-MD-8304
Product Family	Graphic Media, Frosted
Film Type	Polymeric Vinyl
Adhesive Type	Permanent
Usage	Interior and Exterior
Outdoor Durability	Up to 7 years
Available Width(s)	60"
Full Roll Length	100 linear feet
Thickness	5.5 mil
Visible Light Transmission	48%
UV Rejection	90%

#### Product Construction

**Face Film**  
5.5 mil Vinyl

**Adhesive**  
Clear, Solvent Acrylic

**Release Liner**  
3.5 mil Silicone Coated PET

\*This printable and plottable film is provided for general use, but its suitability for specific applications may vary. Users are advised to conduct thorough testing with their equipment and under their specific conditions to determine its compatibility and performance for their intended purposes. The manufacturer makes no guarantees, expressed or implied, regarding the fitness of this film for any particular printing or plotting application. Usage without prior testing is at the user's discretion and risk. It is the responsibility of the user to ensure that the film meets their specific requirements before full-scale production or critical applications.

#### Product Description

SOLYX® SX-MD-8304 Velvet Frost is a versatile glass film designed for privacy and engineered to be both printed and cut for graphics. This makes it an excellent choice for commercial spaces, conference rooms, private offices, or any areas where privacy is desired without sacrificing natural light.

#### Flammability Rating

This product meets ASTM E84 and is classified as Class A as defined in NFPA 101, Life Safety Code®.

#### LEED Credit EQ 4.1 Low Emitting Materials, Adhesives & Sealants

This product has zero VOC content according to 40 CFR 59, Subpart D (EPA method 24).

#### Media\* Use and Warranty

##### Print

Suitable for most UV and Latex printing.

##### Plotting and Masking

RTape AT65 is the recommended masking tape when plotting SX-MD-8301.

##### Installation

Wet applied using dish soap and water solution. See manufacturer's full installation guidelines for further details.

##### Warranty

This SOLYX® product will be free from defects in material and manufacture for a period of five (5) years from the date of interior installation. Exterior installations have a three (3) year warranty. See warranty information for specific details.

#### Product Distribution and Contact Information

##### Distribution

SOLYX® Decorative Films are available through authorized Installing Dealers, Distributors, or directly from Decorative Films, LLC.

Samples submitted upon request.

##### Contact Information

Decorative Films, LLC  
1-888-657-5224  
[www.decorativefilm.com](http://www.decorativefilm.com)