


# SOLYX® Glass Finishes

# **SXWF-BO Blackout**

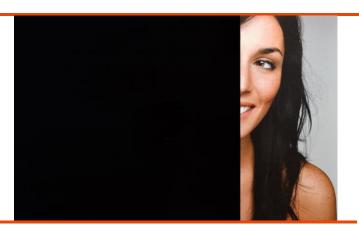

## **Product Description**

 $SOLYX \ SXWF-BO \ Blackout$  is a black, completely opaque, polyester film with a high-gloss finish, ideal for obscuring direct visibility.

#### **Specifications**

•	
Product Code	SXWF-BO
Product Family	Design-Free
Film Type	Polyester
Adhesive Type	Pressure-Sensitive
Usage	Interior or Exterior
Available Width(s)	24", 36", 60", 72"
Full Roll Length	100 linear feet (30.5m)
Thickness	2 mil
Shading Coefficient	0.19
Visible Light Reflection	15%
Visible Light Transmission	0%
UV Transmission	0%
Total Solar Energy Rejected	83%
Solar Energy Absorbed	60%
Glare Reduction	100%
·	·

## **Product Construction**

#### Face Film

2 mil Polyester

#### Adhesive

Clear, Solvent Acrylic, Pressure-Sensitive

#### **Release Liner**

Silicone Coated

#### **Product Details**

SOLYX® SXWF-BO Blackout is a black, completely opaque, polyester film with a high-gloss finish. This film is made of multi-layered durable polyester for 100% light blocking applications and is supplied with a silicone coated liner which protects the clear, pressure-sensitive adhesive. It is designed for application to interior glass or on the outside surface of exterior glass. This ideal privacy film is very easy to install because it is thinner than standard blackout films.

**NOTE:** When considering exterior facing application, this film should never be installed on non-tempered glass.

## **Flammability Rating**

This product meets ASTM E84 and is classified as Class A as defined in NFPA 101, Life Safety Code®.

**LEED Credit EQ 4.1 Low Emitting Materials, Adhesives & Sealants**This product has zero VOC content according to 40 CFR 59, Subpart D (EPA method 24).

## **Installation and Warranty**

#### Installation

Installation should be in accordance with the manufacturer's installation instructions. This film is applied using the same tools and techniques used for installing window tinting films.

## Warranty

This  $\mathbf{SOLYX}$ ® product will be free from defects in material and manufacture for a period of five (5) years from the date of installation. Exterior applications have a three (3) year warranty. See warranty information for specific details.

## **Product Distribution and Contact Information**

## Distribution

 $SOLYX {\bf \$} \ \, {\bf Decorative \ Films \ are \ available \ through \ authorized} \\ \ \, {\bf Installing \ Dealers, \ Distributors, \ or \ directly \ from \ Decorative \ Films, \ LLC.} \\$ 

Samples submitted upon request.

#### **Contact Information**

Decorative Films, LLC 1-888-657-5224 www.decorativefilm.com

MADE IN THE USA